

NMB - LONG-REACH 6-POINT THIN-WALL SOCKETS




Standards :

NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33


Description :

- Thin wall for better access.
- For your safety, use impact sockets and accessories with the appropriate rings and pins.
- 6-point convex pattern for increased resilience.

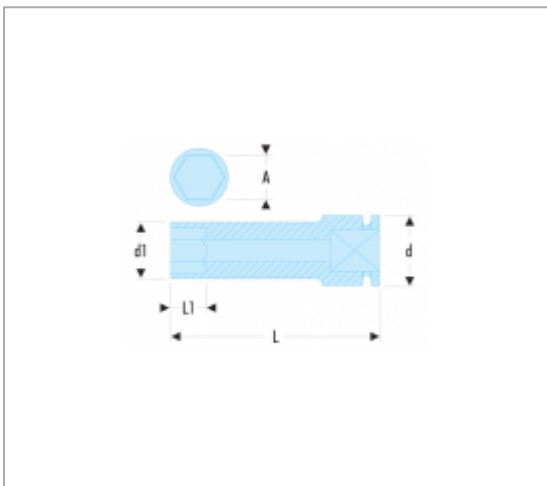

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	CONTAINER	GA	[KG]
NMB.24	24	54	42	24	100	18	6	BA.45B		GA.45B	0.94
NMB.27	27	54	46	27	100	18	6	BA.45B		GA.45B	1
NMB.30	30	54	50	30	100	20	6	BA.45B		GA.45B	1
NMB.32	32	54	50	32	100	22	6	BA.45B		GA.45B	1
NMB.33	33	54	52	33	100	22	6	BA.45B		GA.45B	1
NMB.36	36	54	56	36	100	24	6	BA.45B		GA.45B	1.1
NMB.46	46	54	68	38	100	30	6	BA.45B	Etui : CK.440J1	GA.45B	1.5

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	CONTAINER	GA	[KG]
NMB.50	50	54	73	66	100	33	6	BA.45B	Etui : CK.440J2	GA.45B	1.5