

R.EF 1/4" DRIVE INCH 12-POINT SOCKETS - FLUO




Standards :

ASME B107.10

Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.

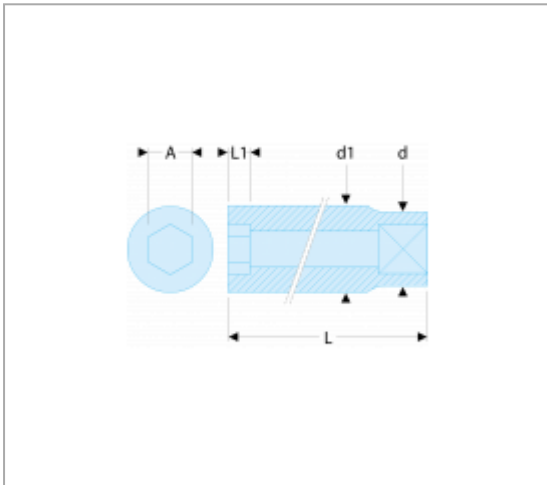

References :

	A ["]	D [MM]	D1 [MM]	D3 [MM]	H [MM]	L [MM]	L1 [MM]	L2 [MM]	12-POINT [MM]	ATTACHME
R.7/32EF	7/32	11,2	9,0	8,30	9,0	22	5,50	5,50	12	12
R.13/32EF	13/32	14,7	14,7	17,00	14,7	22	7,80	7,80	12	12
R.1/2EF	1/2	17,7	17,7	24,5	17,7	22	10,00	10,00	12	12
R.1/4EF	1/4	11,2	10,1	9,30	10,1	22	6,00	6,00	12	12
R.11/32EF	11/32	13,0	13,0	14,50	13,0	22	6,50	6,50	12	12
R.3/16EF	3/16	11,2	8,0	8,20	8,0	22	4,75	4,75	12	12
R.3/8EF	3/8	14,7	14,7	17,80	14,7	22	7,80	7,80	12	12
R.5/16EF	5/16	12,0	12,0	11,50	12,0	22	6,50	6,50	12	12

	A ["]	D [MM]	D1 [MM]	D3 [MM]	H [MM]	L [MM]	L1 [MM]	L2 [MM]	12-POIN [MM]	ATTACHME
R.7/16EF	7/16	15,8	15,8	19,5	15,8	22	9,00	9,00	12	12
R.9/16EF	9/16	18,7	18,7	25,20	18,7	22	10,00	10,00	12	12
R.9/32EF	9/32	11,2	10,6	8,90	10,6	22	6,00	6,00	12	12