

## R.F - 1/4" DRIVE HINGED 12-POINT SOCKETS




### Standards :


ASME B107.1


### Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Compact solution used instead of universal joint.
- Finish: bright chrome.

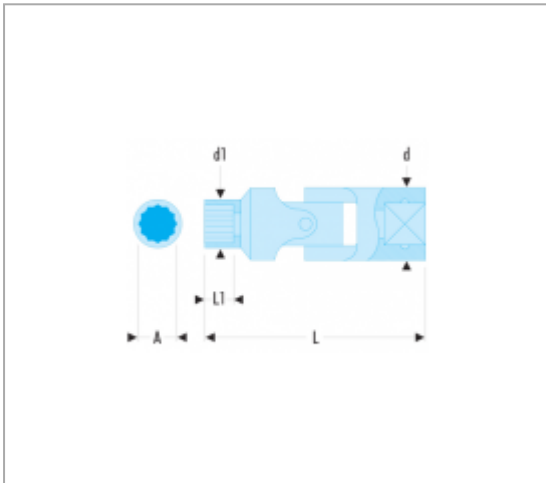

### References :

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[KG]
R.1/2F	1/2	13	18,0	36,8	10,5	12	0.034
R.1/4F	1/4	13	9,8	32,8	6,5	12	0.013
R.11/32F	11/32	13	13,3	33,3	7,0	12	0.016
R.3/16F	3/16	13	8,0	31,6	5,3	12	0.013
R.3/8F	3/8	13	13,7	34,6	8,3	12	0.021
R.5/16F	5/16	13	12,0	33,3	7,0	12	0.014
R.7/16F	7/16	13	15,5	35,8	9,5	12	0.027
R.7/32F	7/32	13	8,5	32,4	6,1	12	0.013

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[KG]
R.9/16F	9/16	13	19,2	36,8	10,5	12	0.035
R.9/32F	9/32	13	10,5	32,8	6,5	12	0.013