

## S - 1/2" METRIC 12-POINT SOCKETS




### Standards :

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5

### Description :


- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.
- Supplied on metal rack.

Ref S.40E (8 --> 16 mm) and Ref S.41E (17 --> 24 mm).

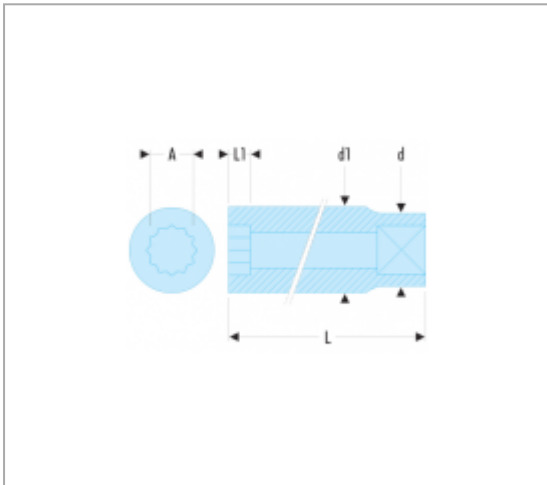

### References :

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
S.8	8	22,8	13,1	36	6,5	12	45
S.9	9	22,8	13,8	36	6,5	12	50
S.21	21	25,1	29,1	38	16,0	12	85
S.20	20	25,4	27,4	36	14,0	12	80
S.23	23	27,6	31,6	38	16,5	12	105
S.26	26	29,0	35,4	38	16,5	12	135
S.28	28	30,5	37,9	44	20,0	12	175
S.25	25	27,7	34,1	38	16,5	12	125

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
S.29	29	31,3	38,7	44	20,0	12	190
S.31	31	34,2	41,6	44	20,0	12	205
S.34	34	37,5	44,9	44	20,0	12	240
S.10	10	22,8	15,3	36	7,8	12	50
S.11	11	22,8	16,5	36	9,0	12	50
S.12	12	22,8	17,8	36	9,5	12	50
S.13	13	22,8	18,9	36	10,4	12	50
S.14	14	22,8	20,2	36	10,5	12	55
S.15	15	22,8	21,4	36	12,0	12	55
S.16	16	21,6	22,6	36	12,0	12	55
S.17	17	23,1	24,1	36	13,0	12	65
S.18	18	23,4	25,4	36	13,0	12	70
S.19	19	24,6	26,6	36	14,0	12	75
S.22	22	26,4	30,4	38	16,5	12	95
S.24	24	28,7	32,7	38	16,5	12	115
S.27	27	29,2	36,6	44	19,0	12	160
S.30	30	33,0	40,4	44	20,0	12	200
S.32	32	35,1	42,5	44	20,0	12	210