


U.232 - 2-LEG SLIDING-LEG PULLERS




Description :

- Versatile: conversion possible in inside or outside grip with the same leg.
- Safety: - Stops to prevent legs from falling. - Under pressure, the legs are set to overhang to avoid sliding.

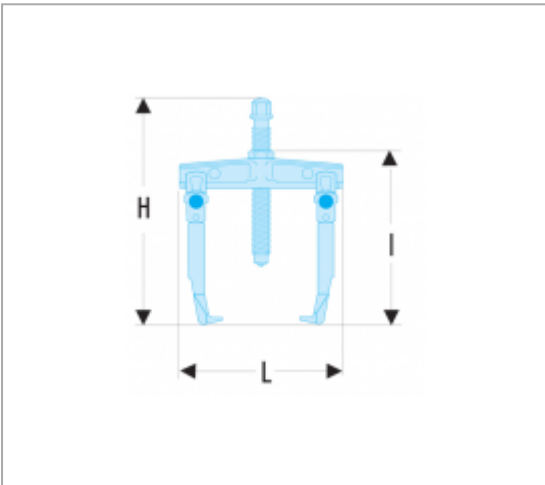

References :

	A1 MINI - MAXI [MM]	H [MM]	WIDTH L [MM]	L [MM]	P MAXI [MM]	HEX SIZE [MM]	PULLER	LEGS	TON [T]	SCREW SIZE	SCREW SIZE [MM]
U.232-65	65-90	133	105	115	65	16	16	U.232G1	1,5	U.35P01	13
U.232-90	86 - 95	182	155	146	100	21	21	U.232G2	3,0	U.35SE1	17
U.232-130	86 - 136	182	155	186	100	21	21	U.232G2	3,0	U.35SE1	17
U.232-160	127 - 171	283	233	247	145	27	27	U.232G3	4,0	U.53S2A07	17
U.232-210	127 - 222	283	233	297	145	27	27	U.232G3	4,0	U.53S2A07	17

	A1 MINI - MAXI [MM]	H [MM]	WIDTH L [MM]	L [MM]	P MAXI [MM]	HEX SIZE [MM]	PULLER	LEGS	TON [T]	SCREW SIZE	SCREW SIZE [MM]
U.232- 270	148 - 276	345	303	379	190	36	36	U.232G4	5,0	U.53S3-07	32
U.232- 340	148 - 346	345	303	449	190	36	36	U.232G4	5,0	U.53S3-07	32