

1/2" DRIVE HINGED HANDLE




Standards :

NF ISO 3315, ISO 3315, DIN 3122, ASME B107.10

Description :

- 180° hinged and secured head to maintain the position even with a socket engaged.
- Bi-material elastomer grip: high resistance to abrasion and the most severe workshop solvents: SP95, SP98, diesel fuel, acetone, brake fluid, Skydrol, Jet Oil, kerosene.

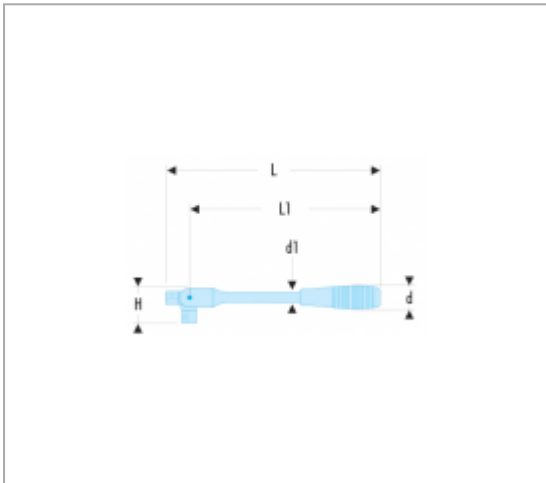

References :

	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[G]
S.141A	31	14	41	381	349,5	595