


50.SR - NON SPARKING METRIC IMPACT RING WRENCHES



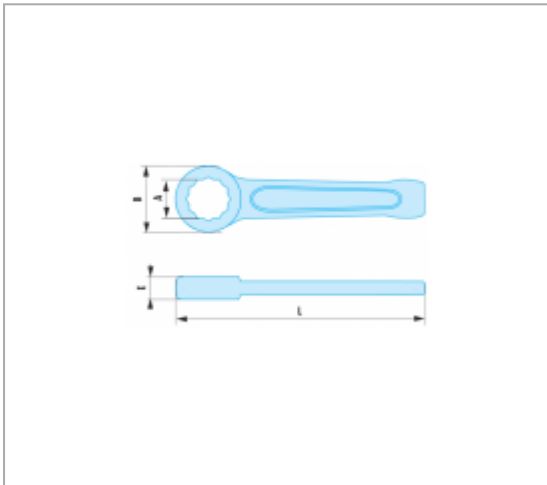

Description :

- Special non sparking and anti-magnetic Copper-Beryllium alloy.



References :

	A [MM]	B [MM]	E [MM]	L [MM]	SCREW SIZE [MM]	[G]
50.17SR	17	32	12,0	145	3	210
50.19SR	19	32	12,0	145	4	200
50.22SR	22	42	14,0	165	5	245
50.24SR	24	42	14,0	165	6	235
50.27SR	27	46	16,0	175	8	350
50.30SR	30	53	16,0	185	10	475
50.32SR	32	53	16,0	185	1/4	465
50.34SR	34	58	19,0	205		580

	A [MM]	B [MM]	E [MM]	L [MM]	SCREW SIZE [MM]	[G]
50.36SR	36	58	19,0	205		580
50.38SR	38	64	20,0	225		790
50.41SR	41	64	20,0	225		755
50.46SR	46	73	22,0	235		990
50.50SR	50	78	23,0	250		1100
50.55SR	55	86	23,5	265		1400
50.60SR	60	92	25,5	274		1600
50.65SR	65	102	28,0	298		2000
50.70SR	70	108	31,5	320		2400
50.75SR	75	113	33,0	326		3000
50.80SR	80	124	34,0	350		3600
50.85SR	85	130	36,0	355		4300
50.90SR	90	142	39,0	390		5500
50.95SR	95	142	39,0	390		5400
50.100SR	100	155	43,0	420		7000
50.105SR	105	155	43,0	420		7000
50.110SR	110	168	45,0	450		9100
50.120SR	120	182	50,0	480		11000
50.130SR	130	200	57,0	520		12600
50.140SR	140	200	57,0	520		13000
50.150SR	150	220	58,0	565		14500