


82H.SR - NON SPARKING INCH KEYS



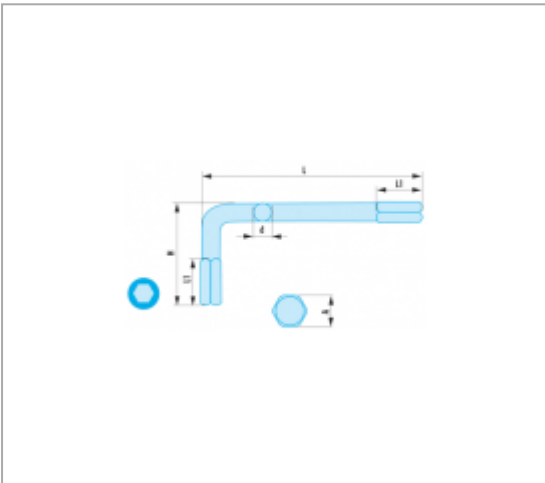

Description :

- Special non sparking and anti-magnetic Copper-Beryllium alloy.



References :

	A ["]	D [MM]	H [MM]	L [MM]	L1 [MM]	[G]
82H.1/16SR	1/16"	3,0	13	38	5	5
82H.5/64SR	5/64"	3,0	13	38	5	5
82H.3/32SR	3/32"	3,3	13	38	6	5
82H.7/64SR	7/64"	3,8	24	58	7	10
82H.1/8SR	1/8"	3,8	24	58	7	10
82H.9/64SR	9/64"	4,0	29	64	10	10
82H.5/32SR	5/32"	4,0	30	65	10	10
82H.3/16SR	3/16"	4,5	31	79	10	15

	A ["]	D [MM]	H [MM]	L [MM]	L1 [MM]	[G]
82H.7/32SR	7/32"	5,0	37	85	15	20
82H.1/4SR	1/4"	6,0	37	85	15	30
82H.9/32SR	9/32"	6,0	43	88	20	45
82H.5/16SR	5/16"	7,0	44	92	20	50
82H.11/32SR	11/32"	8,0	44	97	20	50
82H.3/8SR	3/8"	9,0	45	110	20	85
82H.7/16SR	7/16"	10,0	48	119	20	110
82H.1/2SR	1/2"	11,5	55	140	20	170
82H.9/16SR	9/16"	12,0	58	150	25	195
82H.5/8SR	5/8"	14,0	63	162	25	270
82H.11/16SR	11/16"	15,0	65	168	30	355
82H.3/4SR	3/4"	17,0	73	178	30	450
82H.13/16SR	13/16"	19,0	77	184	35	565
82H.7/8SR	7/8"	20,0	79	187	35	650
82H.15/16SR	15/16"	22,0	82	192	35	825
82H.1PSR	1"	23,0	85	200	35	925
82H.1P1/16SR	1-1/16"	25,0	93	213	35	1200
82H.1P1/8SR	1-1/8"	27,0	100	230	40	1400
82H.1P3/16SR	1-3/16"	28,0	105	240	40	1600
82H.1P1/4SR	1-1/4"	30,0	116	266	40	2000
82H.1P7/16SR	1-7/16"	34,0	128	294	40	2900
82H.1P5/8SR	1-5/8"	39,0	140	320	40	4100