

NKB - 3/4" DRIVE LONG-REACH METRIC THIN-WALL 6-POINT IMPACT SOCKETS




Standards :


NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33


Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.
- Thin wall for better access.
- 6-point convex pattern for increased resilience.

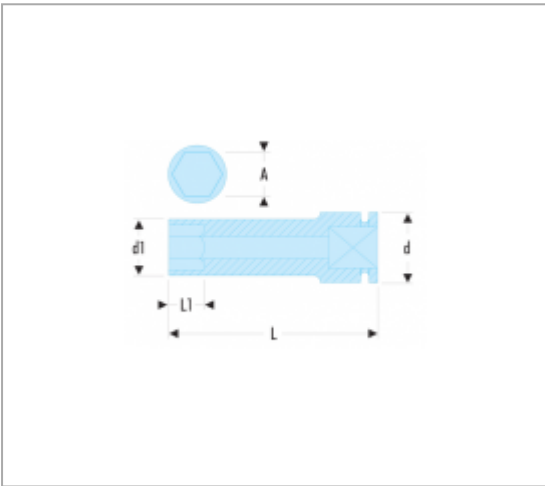

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[G]
NKB.21	21	44	35	21	90	24	6	BA.36B	GA.35B	600
NKB.22	22	44	37	22	90	24	6	BA.36B	GA.35B	600
NKB.24	24	44	39	24	90	40	6	BA.36B	GA.35B	640
NKB.27	27	44	43	27	90	40	6	BA.36B	GA.35B	670
NKB.30	30	44	47	30	90	40	6	BA.36B	GA.35B	700
NKB.32	32	44	48	32	90	65	6	BA.36B	GA.35B	706
NKB.33	33	44	48	33	90	45	6	BA.36B	GA.35B	750

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[G]
NKB.36	36	44	52	36	90	45	6	BA.36B	GA.35B	765