


## 49.SR - NON SPARKING METRIC IMPACT OPEN END WRENCHES



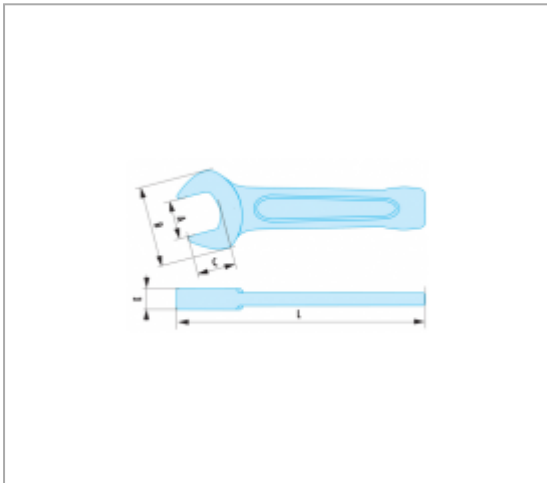

### Description :

- Special non sparking and anti-magnetic Copper-Beryllium alloy.



### References :

	A [MM]	B [MM]	C [MM]	E [MM]	L [MM]	[G]
49.17SR	17	40,5	19	11,0	125	150
49.19SR	19	40,5	19	11,0	125	150
49.22SR	22	46,0	22	12,0	135	195
49.24SR	24	50,0	24	12,0	150	245
49.27SR	27	57,0	27	15,0	175	335
49.30SR	30	64,0	30	16,0	190	435
49.32SR	32	66,0	32	16,0	190	515
49.36SR	36	75,0	36	18,0	210	725

	A [MM]	B [MM]	C [MM]	E [MM]	L [MM]	[G]
49.41SR	41	87,0	41	18,5	230	955
49.46SR	46	98,0	46	20,0	250	1200
49.50SR	50	108,0	50	20,5	275	1300
49.55SR	55	117,0	55	23,0	305	1700
49.60SR	60	128,0	60	23,5	315	2200
49.65SR	65	141,0	65	27,5	335	2700
49.70SR	70	156,0	70	28,5	370	3300
49.75SR	75	162,0	75	29,0	375	3700
49.80SR	80	174,0	80	32,0	400	4500
49.85SR	85	174,0	85	32,0	400	5300
49.90SR	90	194,0	90	36,0	445	6700
49.95SR	95	194,0	95	36,0	445	6700
49.100SR	100	228,0	100	43,0	485	8900
49.110SR	110	238,0	110	45,0	513	11000
49.120SR	120	250,0	120	51,0	530	11000
49.130SR	130	265,0	130	53,0	560	14800