


INSIDE PULLER



Description :

- Versatile: takes 2 or 3 legs. Converts into outside puller with the legs U.306G1 + screw U.20B1 or legs U.310G2 + screw U.310-250-10.
- Comfort: self-gripping legs by return spring. The puller stays in rolling position even when not in tension.
- Safety: legs locked in position on the bearing using a knob. No risk for the puller to escape from the bearing.
- Adaptable puller accessories: hydraulic screw U.3 and slide hammer U.2.

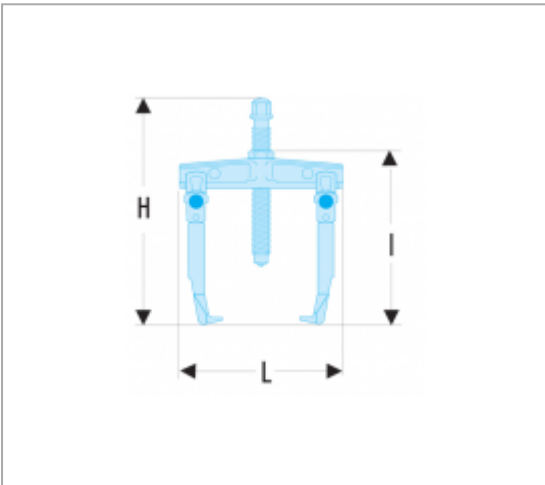

References :

	C MINI - MAXI [MM]	H [MM]	WIDTH L [MM]	L [MM]	P MAXI [MM]	HEX SIZE [MM]	LEGS	TON [T]	SCREW SIZE	SCREW SIZE [MM]	T [KN]	[K
U.310- 230N	50 - 230	400	360	180	200	24	U.310G3	10	U.20B1	24	100	4.