

## 467S.SLS - SHORT METRIC RATCHET COMBINATION WRENCHES




### Standards :

NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691, ASME B107.100


### Description :

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "sliding" cable solution, selected and tested by FACOM, maintains user ergonomics (8 - 30 mm wrenches).
- Extra-short handle ratchet combination wrenches: ideal in inaccessible areas.
- Compact ratchet mechanism and reversible by lever.
- Increment 5° (6° for dimension 7, 8 and 9 mm).
- Ring head angled at 15°.
- Open end head angled at 15°.
- Metric sizes: 7 to 17 mm.
- Presentation: satin chrome finish.

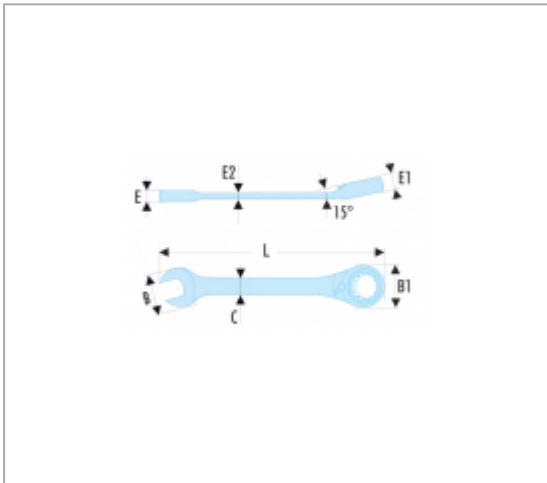

### References :

	A [MM]	B [MM]	B1 [MM]	C [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
467S.7SLS	7	18,6	16,8	7,6	4,6	6,5	3,1	90,5	50
467S.8SLS	8	18,6	16,8	7,6	4,6	6,5	3,1	90,5	50
467S.10SLS	10	22,7	20,2	9,0	5,1	7,3	3,6	95,5	60
467S.11SLS	11	23,7	22,0	9,2	5,2	7,7	3,7	103,5	70
467S.12SLS	12	26,8	23,2	10,0	5,4	8,2	4,0	106,5	75
467S.13SLS	13	28,4	25,3	10,1	5,7	8,6	4,5	108,5	90
467S.14SLS	14	30,8	27,0	11,3	5,9	9,0	4,5	115,5	100
467S.15SLS	15	32,3	28,3	11,8	6,1	9,4	4,7	119,5	115

	A [MM]	B [MM]	B1 [MM]	C [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
467S.16SLS	16	34,9	30,0	12,3	6,6	9,9	5,3	123,5	130
467S.17SLS	17	36,8	31,7	13,1	6,6	10,3	5,4	127,5	140