

44S.SLS - METRIC OPEN END WRENCHES




Standards :


NF ISO 10102, NF ISO 3318, NF ISO 1711-1, NF ISO 691, ISO 10102, ISO 3318, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691, DIN 3110


Description :

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "sliding" cable solution, selected and tested by FACOM, maintains user ergonomics (8 - 30 mm wrenches).
- The open ends are slimmer than a standard combination wrench for better accessibility. Examples: brake calipers, hydraulic hose locknuts.
- Heads hinged at 15°.
- Metric sizes: 6 to 41 mm.
- Presentation: satin chrome finish.

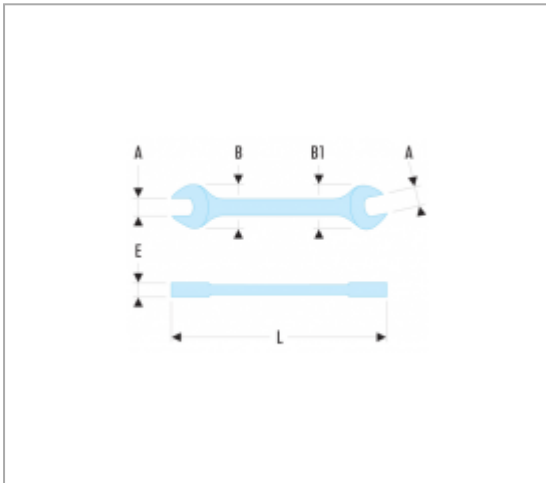

References :

	A [MM]	B [MM]	B X B1 [MM]	B1 [MM]	E [MM]	L [MM]	[G]
44.6X7SLS	6x7	15,0	15,0 x 17,5	17,5	3,7	120	45
44.8X9SLS	8x9	19,0	18,5 x 21,0	22,0	4,2	137	55
44.10X11SLS	10x11	23,0	23,0 x 25,0	25,0	4,9	152	75
44.12X13SLS	12x13	25,5	25,5 x 29,0	29,8	5,5	167	90
44.14X15SLS	14x15	31,0	31,0 x 33,0	33,5	5,7	182	115

	A [MM]	B [MM]	B X B1 [MM]	B1 [MM]	E [MM]	L [MM]	[G]
44.16X17SLS	16x17	37,0	35,5 x 37,0	42,0	6,3	210	155
44.18X19SLS	18x19	39,0	39,0 x 42,0	42,0	7,3	220	185
44.21X23SLS	21x23	47,0	47,0 x 50,5	52,0	8,3	245	250
44.22X24SLS	22x24	47,0	47,5 x 52,0	52,0	8,3	245	250
44.24X27SLS	24x27	53,0	51,0 x 58,0	58,0	8,8	270	350
44.30X32SLS	30x32	64,0	63,0 x 70,0	70,0	9,8	318	540
44.34X36SLS	34x36	71,0	71,0 x 75,0	75,0	11,7	342	745
44.36X41SLS	36x41	78,0	78,0 x 87,0	87,0	12,3	381	970