


PNEUMATIC CRIMPER AND PUNCH




Description :

- To prepare panels for overlap welding in bodywork or mechanical welding.
- Double function tool: crimping and punching.
- Conforms with bodywork specifications.
- Rotating head.
- Punch diameter: 8 mm.
- Punch capacity: 1 kW.
- Noise level: 81 dB(A).
- Vibration 2.1 m/s²/a.
- Vibration 0.7 m/s²/K.
- Min hose diameter. 10 mm - 3/8".
- 1/4" NPT tool connection.
- Average air consumption 113 l/min.
- Planishing capacity 1.2 mm.
- Operating pressure 6.2 bar.

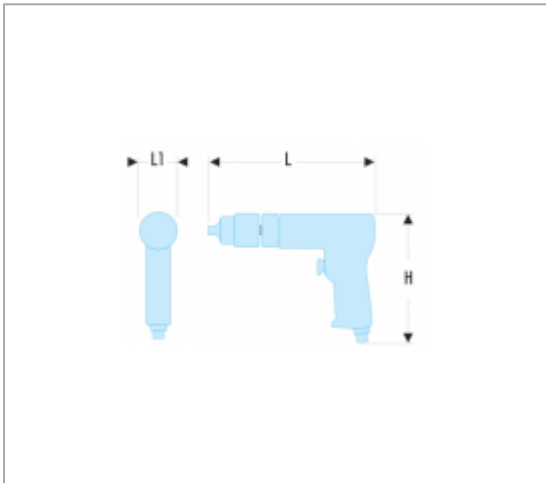

References :

|  | H [MM] | L [MM] | L1 [MM] | [KG] |
|---|--------|--------|---------|------|
| V.PF300F | 150 | 165 | 55 | 1.1 |