

## 484 - TWIN SLIP-JOINT MULTIGRIP PLIERS




### Standards :


NF ISO 8976, ISO 8976, DIN ISO 8976, ASME B107.500

### Description :

- Inter-slotted jaws distribute load either side of central pin.
- 2 heavy-gauge slots for optimum safety and durability.
- 7 positions.
- Capacity: - 484A: 34 mm. - 484A.30: 43 mm.
- Finish: satin surface.

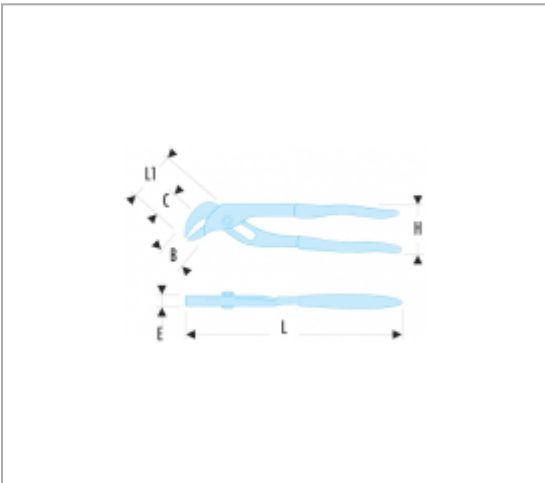

### References :

	A [MM]	B [MM]	C [MM]	E [MM]	H [MM]	L [MM]	L1 [MM]	[G]
484A	33	33	38	7,0	50	240	60	345
484A.30	38	38	40	9,5	52	300	66	560