

## 467 - METRIC STANDARD RATCHET COMBINATION WRENCHES - RFID




### Standards :

NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691


### Description :

- Tool with built-in RFID chip for workshop traceability.
- Chip integration by Facom guarantees maximum detection and strength, while preserving the tool's ergonomics.
- Radio frequency identification requires appropriate storage equipment.
- Standard ratchet combination wrenches: for all current applications.
- Compact ratchet mechanism and reversible by lever.
- Increment 5° (7.5° for dimension 6 mm; 6° for dimensions 7, 8 and 9 mm).
- Ring head angled at 15°.
- Open end head angled at 15°.
- Metric sizes: 6 to 32 mm.
- Presentation: satin chrome finish.

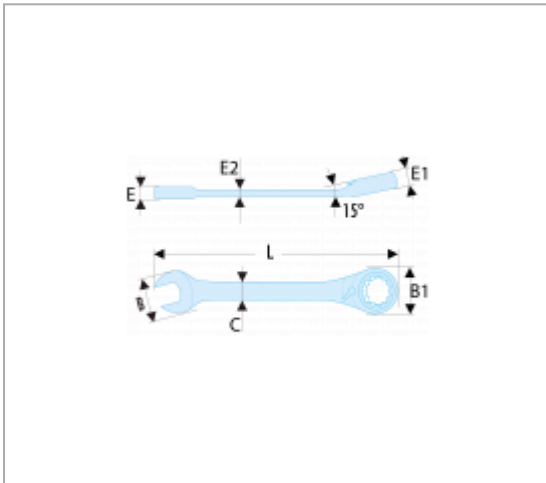

### References :

|            | A [MM] | B [MM] | B1 [MM] | C [MM] | E [MM] | E1 [MM] | E2 [MM] | L [MM] | [G] |
|------------|--------|--------|---------|--------|--------|---------|---------|--------|-----|
| 467.6RFID  | 6      | 15,0   | 14,0    | 9,7    | 4,0    | 6,9     | 4,5     | 128    | 35  |
| 467.7RFID  | 7      | 16,7   | 17,0    | 9,7    | 4,3    | 6,5     | 4,5     | 140    | 35  |
| 467.8RFID  | 8      | 16,7   | 17,0    | 9,7    | 4,3    | 6,5     | 4,5     | 140    | 35  |
| 467.9RFID  | 9      | 18,7   | 18,6    | 10,3   | 4,5    | 6,9     | 4,5     | 149    | 45  |
| 467.10RFID | 10     | 20,8   | 20,2    | 11,3   | 5,0    | 7,3     | 4,9     | 158    | 55  |
| 467.11RFID | 11     | 23,0   | 22,0    | 12,2   | 5,3    | 7,7     | 5,2     | 165    | 65  |
| 467.12RFID | 12     | 24,6   | 23,4    | 13,0   | 5,5    | 8,2     | 8       | 171    | 75  |
| 467.13RFID | 13     | 26,8   | 25,5    | 14,5   | 6,1    | 8,6     | 8       | 178    | 95  |

|  | A [MM] | B [MM] | B1 [MM] | C [MM] | E [MM] | E1 [MM] | E2 [MM] | L [MM] | [G]  |
|---|--------|--------|---------|--------|--------|---------|---------|--------|------|
| 467.14RFID  | 14     | 29,0   | 26,9    | 15,1   | 6,5    | 9,0     | 8,5     | 190    | 115  |
| 467.15RFID  | 15     | 31,0   | 28,3    | 16,1   | 6,8    | 9,4     | 9       | 199    | 135  |
| 467.16RFID  | 16     | 33,0   | 29,8    | 17,3   | 7,1    | 9,9     | 10      | 208    | 150  |
| 467.17RFID  | 17     | 35,5   | 31,8    | 18,2   | 7,5    | 10,3    | 11      | 225    | 180  |
| 467.18RFID  | 18     | 37,5   | 32,7    | 19,6   | 8,1    | 10,7    | 11,1    | 236    | 210  |
| 467.19RFID  | 19     | 39,4   | 34,0    | 20,4   | 8,6    | 11,2    | 11,1    | 247    | 240  |
| 467.21RFID  | 21     | 45,8   | 40,1    | 23,9   | 9,0    | 13,0    | 12      | 287,8  | 350  |
| 467.22RFID  | 22     | 45,8   | 40,1    | 23,9   | 9,0    | 13,0    | 12      | 287,8  | 350  |
| 467.24RFID  | 24     | 51,8   | 46,5    | 26,4   | 10,0   | 14,5    | 12,5    | 321    | 490  |
| 467.27RFID  | 27     | 56,4   | 52,4    | 29,2   | 10,8   | 15,5    | 13      | 356,6  | 670  |
| 467.30RFID  | 30     | 62,7   | 58,1    | 31,7   | 11,5   | 17,0    | 13,5    | 400,7  | 880  |
| 467.32RFID  | 32     | 66,4   | 61,9    | 33,7   | 12,4   | 17,5    | 14      | 423,5  | 1100 |