

J.HLA - 3/8" LONG-REACH METRIC 6-POINT SOCKETS - RFID




Standards :

NF ISO 1711-1, ISO 1711-1


Description :

- Tool with built-in RFID chip for workshop traceability.
- Chip integration by Facom guarantees maximum detection and strength, while preserving the tool's ergonomics.
- Radio frequency identification requires appropriate storage equipment.
- OGV® profile: more powerful tightening, preserves fasteners.
- Long-reach sockets for long recess or thread access.
- Metric dimensions : from 7 to 24 mm.
- Finish: bright chrome.

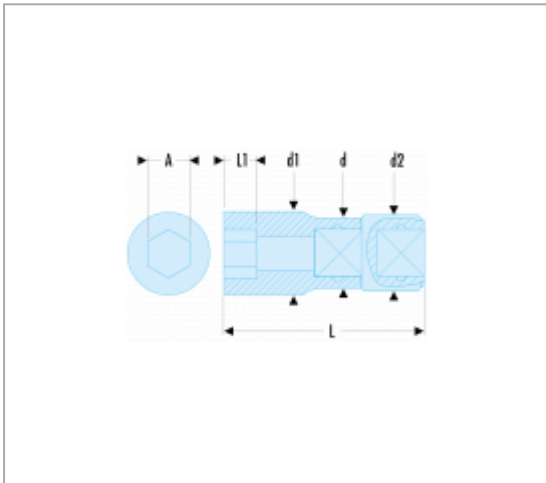

References :

| | A [MM] | D [MM] | D1 [MM] | D2 [MM] | L [MM] | L1 [MM] | HEX SIZE [MM] | [G] |
|-------------|--------|--------|---------|---------|--------|---------|---------------|-----|
| J.7HLARFID | 7 | 17,3 | 10,6 | 25 | 75 | 6,0 | 6 | 95 |
| J.8HLARFID | 8 | 17,3 | 12,0 | 25 | 75 | 7,5 | 6 | 100 |
| J.9HLARFID | 9 | 17,3 | 13,0 | 25 | 75 | 7,5 | 6 | 100 |
| J.10HLARFID | 10 | 17,3 | 14,5 | 25 | 75 | 9,0 | 6 | 100 |
| J.11HLARFID | 11 | 17,3 | 16,0 | 25 | 75 | 10,5 | 6 | 105 |
| J.12HLARFID | 12 | 17,2 | 16,8 | 25 | 75 | 12,0 | 6 | 105 |
| J.13HLARFID | 13 | 17,0 | 18,0 | 25 | 75 | 12,0 | 6 | 105 |
| J.14HLARFID | 14 | 18,0 | 20,0 | 25 | 75 | 15,0 | 6 | 110 |

|  | A [MM] | D [MM] | D1 [MM] | D2 [MM] | L [MM] | L1 [MM] | HEX SIZE [MM] | [G] |
|---|--------|--------|---------|---------|--------|---------|---------------|-----|
| J.15HLARFID | 15 | 20,0 | 21,0 | 25 | 80 | 15,0 | 6 | 125 |
| J.16HLARFID | 16 | 20,0 | 22,0 | 25 | 80 | 15,0 | 6 | 135 |
| J.17HLARFID | 17 | 22,0 | 23,5 | 25 | 80 | 15,0 | 6 | 155 |
| J.18HLARFID | 18 | 23,0 | 24,5 | 25 | 80 | 18,0 | 6 | 160 |
| J.19HLARFID | 19 | 24,0 | 25,0 | 25 | 80 | 18,0 | 6 | 160 |
| J.21HLARFID | 21 | 26,0 | 27,0 | 25 | 80 | 18,0 | 6 | 175 |
| J.22HLARFID | 22 | 28,0 | 29,0 | 25 | 80 | 21,0 | 6 | 200 |
| J.24HLARFID | 24 | 30,0 | 31,0 | 25 | 80 | 24,0 | 6 | 230 |