

A.VE - PROTWIST® 1,000 VOLT INSULATED SCREWDRIVERS FOR SLOTTED-HEAD SCREWS - RFID




Standards :


NF ISO 2380-1, NF ISO 2380-2, NF EN 60900, ISO 2380-1, ISO 2380-2, EN 60900, DIN ISO 2380-1, DIN ISO 2380-2, DIN EN 60900, ASME B107.600


Description :

- Tool with built-in RFID chip for workshop traceability.
- Chip integration by Facom guarantees maximum detection and strength, while preserving the tool's ergonomics.
- Radio frequency identification requires appropriate storage equipment.
- For your safety, each screwdriver is tested individually at 10,000 Volt for 10 seconds, at the end of the manufacturing cycle.
- 1,000 Volt sheathed round blade.
- Bi-material grip resists to impacts, abrasion, and chemicals.

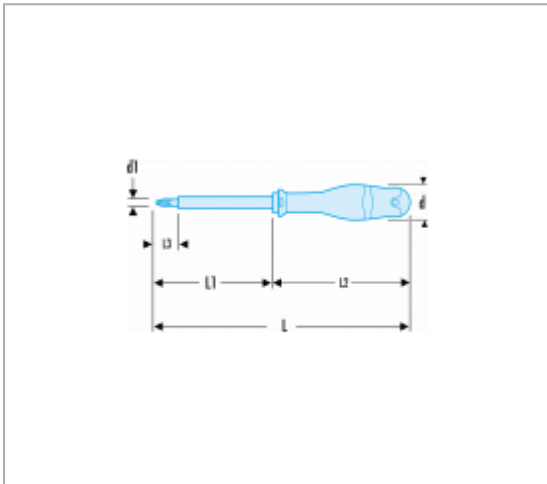

References :

	A [MM]	D [MM]	E [MM]	L [MM]	L1 [MM]	L2 [MM]	L3 [MM]	[G]
A2X75VERFID	2,0	19	0,4	170	58	95	18	65
A2.5X75VERFID	2,5	25	0,4	178	58	103	18	75
A3X75VERFID	3,0	25	0,5	178	58	103	18	80
A3.5X100VERFID	3,5	25	0,6	204	82	104	18	85
A4X100VERFID	4,0	30	0,8	210	82	110	18	90
A5.5X125VERFID	5,5	30	1,0	235	106,5	110	18	130
A6.5X150VERFID	6,5	36	1,2	270	131	120	18	160

	A [MM]	D [MM]	E [MM]	L [MM]	L1 [MM]	L2 [MM]	L3 [MM]	[G]
A8X150VERFID	8,0	40	1,2	275	131	125	18	200