


S - 1/2" INCH 12-POINT SOCKETS - RFID



Description :

- Tool with built-in RFID chip for workshop traceability.
- Chip integration by Facom guarantees maximum detection and strength, while preserving the tool's ergonomics.
- Radio frequency identification requires appropriate storage equipment.
- OGV® profile: more powerful tightening, preserves fasteners.
- Long-reach sockets for long recess or thread access.
- Metric dimensions : from 12 to 32 mm.
- Finish: bright chrome.

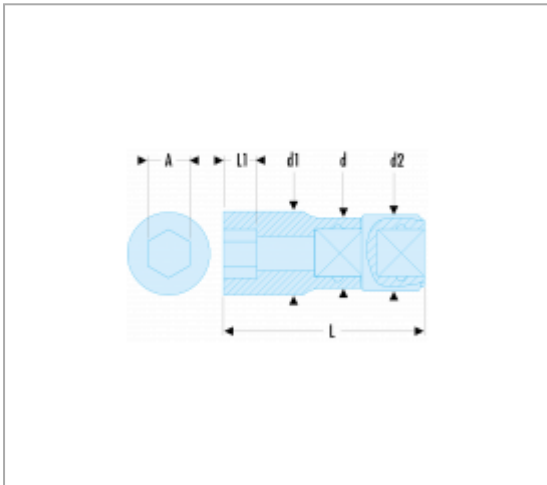

References :

	A ["]	D [MM]	D1 [MM]	D2 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
S.3/8RFID	3/8	22,8	14,7	29	60	7,8	12	130
S.7/16RFID	7/16	22,8	16,5	29	60	9,0	12	135
S.1/2RFID	1/2	22,8	18,9	29	60	10,4	12	135
S.9/16RFID	9/16	22,8	20,2	29	60	10,5	12	140
S.19/32RFID	19/32	22,8	21,4	29	60	12,0	12	140
S.5/8RFID	5/8	21,6	22,6	29	60	12,0	12	145
S.21/32RFID	21/32	23,1	24,1	29	60	13,0	12	145
S.11/16RFID	11/16	22,6	24,6	29	60	13,0	12	155

	A ["]	D [MM]	D1 [MM]	D2 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
S.3/4RFID	3/4	25,0	27,0	29	60	14,0	12	150
S.25/32RFID	25/32	25,9	27,9	29	60	14,0	12	155
S.13/16RFID	13/16	24,6	28,6	29	62	16,0	12	180
S.7/8RFID	7/8	26,4	30,4	29	62	16,5	12	180
S.15/16RFID	15/16	28,7	32,7	29	62	16,5	12	215
S.31/32RFID	31/32	27,7	34,1	29	62	16,5	12	215
S.1PRFID	1	28,3	34,7	29	62	16,5	12	225
S.1P1/16RFID	1 1/16	29,2	36,6	29	68	19,0	12	230
S.1P1/8RFID	1 1/8	31,3	38,7	29	68	20,0	12	250
S.1P3/16RFID	1 3/16	33,0	40,4	29	68	20,0	12	265
S.1P1/4RFID	1 1/4	35,1	42,5	29	68	20,0	12	285