


AT.VE - PROTWIST® 1,000 VOLT INSULATED SCREWDRIVERS FOR SLOTTED-HEAD SCREWS

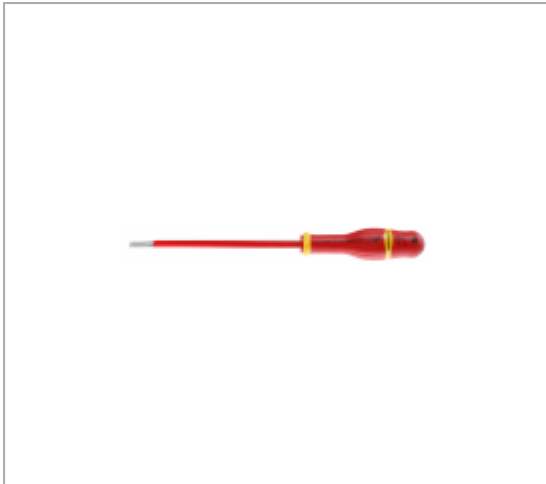


Standards :


NF ISO 2380-1, NF ISO 2380-2, NF EN 60900, ISO 2380-1, ISO 2380-2, EN 60900, DIN ISO 2380-1, DIN ISO 2380-2, DIN EN 60900ASME B107.600


Description :

- For your safety, each screwdriver is tested individually at 10,000 volts for 10 seconds, at the end of the manufacturing cycle.
- 1,000 Volt sheathed round blade.
- Milled blade: --> 5.5 mm included.
- Fillet blade: 6.5 --> 12 mm.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- New chemical resistant handle with "power" channel for higher torque transfer.
- New softer handle material for improved comfort.

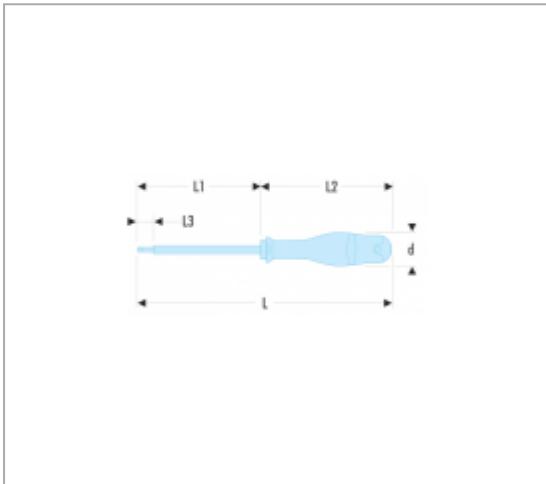

References :

|  | A [MM] | D [MM] | E [MM] | L [MM] | L1 [MM] | L2 [MM] | L3 [MM] | [G] |
|---|--------|--------|--------|--------|---------|---------|---------|-----|
| AT2X75VE | 2,0 | 19 | 0,4 | 170 | 40 | 95 | 18 | 23 |
| AT2.5x75VE | 2,5 | 25 | 0,4 | 178 | 75 | 103 | 18 | 32 |
| AT3X75VE | 3,0 | 25 | 0,5 | 178 | 75 | 103 | 18 | 38 |
| AT3X100VE | 3,0 | 25 | 0,5 | 202 | 100 | 103 | 18 | 39 |
| AT4X150VE | 4,0 | 30 | 0,8 | 260 | 150 | 110 | 18 | 53 |
| AT5.5x125VE | 5,5 | 30 | 1,0 | 235 | 125 | 110 | 18 | 88 |
| AT5.5x200VE | 5,5 | 30 | 1,0 | 310 | 200 | 110 | 18 | 106 |

|  | A [MM] | D [MM] | E [MM] | L [MM] | L1 [MM] | L2 [MM] | L3 [MM] | [G] |
|---|--------|--------|--------|--------|---------|---------|---------|-----|
| AT6.5x200VE | 6,5 | 36 | 1,2 | 320 | 200 | 120 | 18 | 170 |
| AT8X200VE | 8,0 | 40 | 1,2 | 325 | 200 | 125 | 18 | 180 |
| AT12X250VE | 12,0 | 40 | 2,0 | 375 | 250 | 125 | 18 | 360 |
| AT2.5X50VE | 2,5 | 25 | 0,4 | 153 | 50 | 103 | 18 | 30 |
| AT10X200VE | 10,0 | 40 | 1,6 | 325 | 200 | 125 | 18 | 240 |
| AT3.5x100VE | 3,5 | 25 | 0,6 | 204 | 100 | 104 | 18 | 44 |
| AT4X100VE | 4,0 | 30 | 0,8 | 210 | 100 | 110 | 18 | 48 |
| AT6.5x150VE | 6,5 | 36 | 1,2 | 270 | 150 | 120 | 18 | 120 |
| AT8X150VE | 8,0 | 40 | 1,2 | 275 | 150 | 125 | 18 | 160 |
| AT3.5x75VE | 3,5 | 25 | 0,6 | 179 | 75 | 104 | 18 | 42 |
| AT5.5x150VE | 5,5 | 30 | 1,0 | 260 | 150 | 110 | 18 | 92 |