

R 1/4" DRIVE INCH 6-POINT SOCKETS




Standards :

ASME B107.1

Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.
- Available as rack set (Ref R.40U).

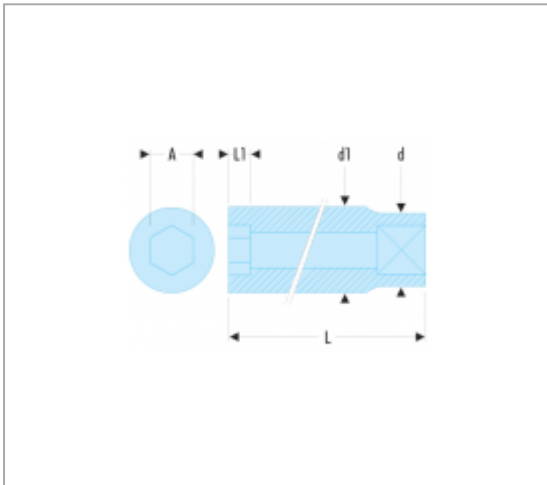

References :

	A ["]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	[KG]
R.3/16	3/16	11,2	8,0	4,75	22	4,8	6	0.006
R.7/32	7/32	11,2	9,0	5,50	22	5,5	6	0.008
R.1/4	1/4	11,2	10,1	6	22	6,0	6	0.008
R.9/32	9/32	11,0	11,0	6	22	6,0	6	0.010
R.5/16	5/16	12,0	12,0	6,50	22	6,5	6	0.010
R.11/32	11/32	13,2	13,2	6,50	22	6,5	6	0.012
R.3/8	3/8	14,7	14,7	7,80	22	7,8	6	0.016
R.13/32	13/32	14,7	14,7	7,80	22	7,8	6	0.016

	A ["]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	[KG]
R.7/16	7/16	15,8	15,8	9	22	9,0	6	0.016
R.1/2	1/2	17,7	17,7	10	22	10,0	6	0.022
R.9/16	9/16	18,7	18,7	10	22	10,0	6	0.024