


## 64 - METRIC STRAIGHT RATCHET RING WRENCHES - RFID

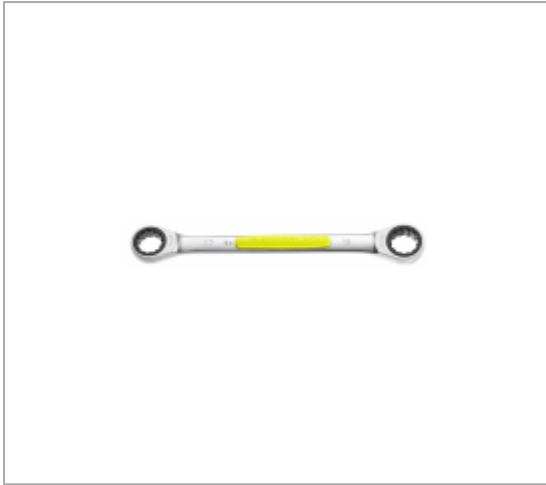


### Standards :

NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691, ASME B107.100


### Description :

- Tool with built-in RFID chip for workshop traceability.
- Chip integration by Facom guarantees maximum detection and strength, while preserving the tool's ergonomics.
- Radio frequency identification requires appropriate storage equipment.
- Straight ratchet ring wrenches: to reach the nut flat.
- Compact ratchet mechanism and reversible by flipping the wrench.
- Increment 5° (7.5° for dimension 6 mm; 6° for dimensions 7, 8 and 9 mm).
- Metric sizes: 6 to 24 mm.
- Presentation: satin chrome finish.

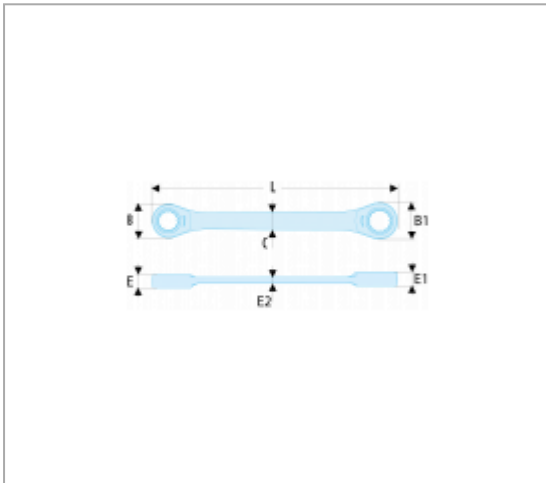

### References :

	A [MM]	B [MM]	B1 [MM]	C [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
64.6X7RFID	6x7	14,2	17,2	8,0	6,3	6,5	5	115	40
64.8X9RFID	8x9	16,8	20,2	8,3	6,5	6,9	5,2	128	50
64.10X11RFID	10x11	20,2	21,8	9,1	7,3	7,7	9	150	70
64.12X13RFID	12x13	23	24,8	11,3	8,2	8,6	9,5	170	90
64.14X15RFID	14x15	26,5	29,5	13,1	9,0	9,4	12	190	140
64.16X18RFID	16x18	29,5	33,5	14,8	9,9	10,7	12,5	210	195
64.17X19RFID	17x19	31,5	33,5	15,2	10,3	11,2	12,5	230	205
64.21X23RFID	21x23	40	46,0	15,2	13,0	14,5	16	260	490

	A [MM]	B [MM]	B1 [MM]	C [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
64.22X24RFID	22x24	40	46,0	15,2	13,0	14,5	16	260	490